

IEC SYSTEM FOR MUTUAL RECOGNITION OF TEST
CERTIFICATES FOR ELECTRICAL EQUIPMENT
(IECEE) CB SCHEME

SYSTEME CEI D'ACCEPTATION MUTUELLE DE
CERTIFICATS D'ESSAIS DES EQUIPEMENTS
ELECTRIQUES (IECEE) METHODE OC

CB TEST CERTIFICATE

CERTIFICAT D'ESSAI OC

Product
Produit

Li-ion Polymer Battery

Name and address of the applicant
Nom et adresse du demandeur

EVE Energy Co., Ltd.
No. 36, Hui Feng 7th Road
Zhongkai Hi-Tech Zone, Huizhou, Guangdong, P.R. China

Name and address of the manufacturer
Nom et adresse du fabricant

EVE Energy Co., Ltd.
No. 36, Hui Feng 7th Road
Zhongkai Hi-Tech Zone, Huizhou, Guangdong, P.R. China

Name and address of the factory
Nom et adresse de l'usine

EVE Energy Co., Ltd.
No. 36, Hui Feng 7th Road
Zhongkai Hi-Tech Zone, Huizhou, Guangdong, P.R. China

Ratings and principal characteristics
Valeurs nominales et caractéristiques principales

3.7V, 170mAh, 0.63Wh

Trademark (if any)
Marque de fabrique (si elle existe)

Type of Manufacturer's Testing Laboratories used
Type de programme du laboratoire d'essais constructeur

N/A

Model / Type Ref.
Ref. de type

EVE 651723

Additional information (if necessary may also be
reported on page 2)
Les informations complémentaires (si nécessaire,
peuvent être indiqués sur la 2^{ème} page)

A sample of the product was tested and found
to be in conformity with
Un échantillon de ce produit a été essayé et a été
considéré conforme à la

IEC 62133:2012
National differences see test report

As shown in the Test Report Ref. No. which forms part
of this Certificate
Comme indiqué dans le Rapport d'essais numéro de
référence qui constitue partie de ce Certificat

17056117 001

This CB Test Certificate is issued by the National Certification Body
Ce Certificat d'essai OC est établi par l'Organisme National de Certification




TÜVRheinland®

TÜV Rheinland Japan Ltd.
Global Technology Assessment Center
4-25-2 Kita-Yamata, Tsuzuki-ku
Yokohama 224-0021 Japan
Phone + 81 45 914-3888
Fax + 81 45 914-3354
Mail: info@jpn.tuv.com
Web: www.tuv.com

Date: 01.07.2016

Signature:

Dipl.-Ing. Univ. S. O. Steinke

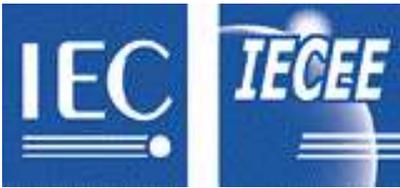

Test Report issued under the responsibility of:



**TEST REPORT
IEC 62133**

Secondary cells and batteries containing alkaline or other non-acid electrolytes – Safety requirements for portable sealed secondary cells, and for batteries made from them, for use in portable applications

Report Number: 17056117 001

Date of issue: 2016-07-01

Total number of pages 24 pages

Applicant's name.....: **EVE Energy Co., Ltd.**

Address: No. 36, Hui Feng 7th Road, Zhongkai Hi-Tech Zone, Huizhou, Guangdong, P.R. China

Test specification:

Standard: IEC 62133: 2012 (Second Edition)

Test procedure: CB Scheme

Non-standard test method.....: N/A

Test Report Form No.....: IEC62133B

Test Report Form(s) Originator: UL(Demko)

Master TRF: Dated 2013-03

Copyright © 2013 Worldwide System for Conformity Testing and Certification of Electrotechnical Equipment and Components (IECEE), Geneva, Switzerland. All rights reserved.

This publication may be reproduced in whole or in part for non-commercial purposes as long as the IECEE is acknowledged as copyright owner and source of the material. IECEE takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

If this Test Report Form is used by non-IECEE members, the IECEE/IEC logo and the reference to the CB Scheme procedure shall be removed.

This report is not valid as a CB Test Report unless signed by an approved CB Testing Laboratory and appended to a CB Test Certificate issued by an NCB in accordance with IECEE 02.

Test item description: Li-ion Polymer Battery

Trade Mark: N/A

Manufacturer.....: Same as applicant

Address: Same as applicant

Model/Type reference: EVE 651723

Ratings: 3.7V, 170mAh, 0.63Wh

| | | |
|--|--|--|
| Testing procedure and testing location: | | |
| <input checked="" type="checkbox"/> | CB Testing Laboratory: | TÜV Rheinland (Shenzhen) Co., Ltd. |
| Testing location/ address | | East of F/1, F/2~F/4, Building 1, Cybio Technology Building No. 6 Langshan No.2 Road, North Hi-tech Industry Park 518057 Shenzhen Nanshan District CHINA |
| <input type="checkbox"/> | Associated CB Testing Laboratory: | |
| Testing location/ address | | |
| Tested by (name + signature).....: | | Jason Tang |
| Approved by (name + signature) | | Jacob Lu |
| | | <i>Jason Tang</i> <i>Jacob Lu</i> |
| <input type="checkbox"/> | Testing procedure: TMP | |
| Testing location/ address | | |
| Tested by (name + signature).....: | | |
| Approved by (name + signature) | | |
| <input type="checkbox"/> | Testing procedure: WMT | |
| Testing location/ address | | |
| Tested by (name + signature).....: | | |
| Witnessed by (name + signature) | | |
| Approved by (name + signature) | | |
| <input type="checkbox"/> | Testing procedure: SMT | |
| Testing location/ address | | |
| Tested by (name + signature).....: | | |
| Approved by (name + signature) | | |
| Supervised by (name + signature)....: | | |

| | |
|---|--|
| <p>List of Attachments (including a total number of pages in each attachment):</p> <p>Attachment 1: Photo documentation (4 pages).</p> | |
| <p>Summary of testing:</p> | |
| <p>Tests performed (name of test and test clause):</p> <p>cl.5.6.2 Design recommendation(Lithium system); cl.8.1 Charging procedure for test purposes (for Cells and Batteries); cl.8.2.1 Continuous charging at constant voltage (Cells); cl.8.3.1 External short circuit (Cells); cl.8.3.2 External short circuit (Batteries); cl.8.3.3 Free fall (Cells and Batteries); cl.8.3.4 Thermal abuse (Cells); cl.8.3.5 Crush (Cells); cl.8.3.6 Over-charging of battery; cl.8.3.7 Forced discharge (Cells); cl.8.3.8 Transport tests (Cells); cl.8.3.9 Design evaluation – Forced internal short circuit (Cells);</p> <p>The electrolyte type of this cell doesn't belong to polymer, and the additional test cl.8.3.9 was carried out to evaluate the cell.</p> <p>Tests are made with the number of cells and batteries specified in IEC 62133: 2012 (Second Edition) Table 2.</p> | <p>Testing location:</p> <p>TÜV Rheinland (Shenzhen) Co., Ltd. East of F/1, F/2~F/4, Building 1, Cybio Technology Building No. 6 Langshan No.2 Road, North Hi-tech Industry Park 518057 Shenzhen Nanshan District CHINA</p> |
| <p>Summary of compliance with National Differences:</p> <p>BE, BY, CH, CN, DE, DK, FI, FR, GB, HU, JP, KR, NL, NO, SE, SG. BE=Belgium, BY=Belarus, CH=Switzerland, CN=China, DE=Germany, DK=Denmark, FI=Finland, FR=France, GB=United Kingdom, HU=Hungary, JP=Japan, KR=Republic of Korea, NL=The Netherlands, NO=Norway, SE=Sweden, SG=Singapore.</p> <p><input checked="" type="checkbox"/> The product fulfils the requirements of <u>EN62133: 2013</u></p> | |

Copy of marking plate:

The artwork below may be only a draft. The use of certification marks on a product must be authorized by the respective NCBs that own these marks.

Li-ion Polymer Battery
EVE 651723
3.7V 170mAh 0.63Wh
1ICP7/18/24 Date: xxxxxx
EVE Energy Co., Ltd.

| | |
|---|--|
| Test item particulars: | |
| Classification of installation and use: | N/A |
| Supply connection: | DC copper plate |
| Recommend charging method declared by the manufacturer | Charging the battery with 34mA constant current and 4.20V constant voltage until the current reduces to 1.7mA at ambient 20°C±5°C. |
| Discharge current (0.2 I_L A) | 34mA |
| Specified final voltage: | 3.0V |
| Chemistry | <input type="checkbox"/> nickel systems <input checked="" type="checkbox"/> lithium systems |
| Recommend of charging limit for lithium system | |
| Upper limit charging voltage per cell: | 4.25V |
| Maximum charging current | 85mA |
| Charging temperature upper limit | 45°C |
| Charging temperature lower limit: | 10°C |
| Polymer cell electrolyte type | <input type="checkbox"/> gel polymer <input type="checkbox"/> solid polymer <input checked="" type="checkbox"/> N/A |
| Possible test case verdicts: | |
| - test case does not apply to the test object.....: | N/A |
| - test object does meet the requirement.....: | P (Pass) |
| - test object does not meet the requirement.....: | F (Fail) |
| Testing: | |
| Date of receipt of test item | Jun 02, 2016 |
| Date (s) of performance of tests | Jun 03, 2016 – Jun 28, 2016 |
| General remarks: | |
| The test results presented in this report relate only to the object tested. This report shall not be reproduced, except in full, without the written approval of the Issuing testing laboratory. "(See Enclosure #)" refers to additional information appended to the report. "(See appended table)" refers to a table appended to the report. Throughout this report a <input type="checkbox"/> comma / <input checked="" type="checkbox"/> point is used as the decimal separator. | |
| Manufacturer's Declaration per sub-clause 4.2.5 of IEC60068-2-61: | |
| The application for obtaining a CB Test Certificate includes more than one factory location and a declaration from the Manufacturer stating that the sample(s) submitted for evaluation is (are) representative of the products from each factory has been provided | <input type="checkbox"/> Yes <input checked="" type="checkbox"/> Not applicable |
| When differences exist; they shall be identified in the General product information section. | |
| Name and address of factory (ies) | Same as applicant |

General product information:

This battery is constructed with single lithium-ion cell in 1S1P, and has overcharge, over-discharge, over current and short-circuits proof circuit.

The main features of the battery are shown as below (clause 8.1.1):

| Model | Nominal capacity | Nominal voltage | Nominal Charge Current | Nominal Discharge Current | Maximum Charge Current | Maximum Discharge Current | Maximum Charge Voltage | Cut-off Voltage |
|------------|------------------|-----------------|------------------------|---------------------------|------------------------|---------------------------|------------------------|-----------------|
| EVE 651723 | 170mAh | 3.7V | 34mA | 34mA | 85mA | 170mA | 4.2V | 3.0V |

The main features of the battery are shown as below (clause 8.1.2):


| Model | Upper limit charge voltage | Taper-off current | Lower charge temperature | Upper charge temperature |
|------------|----------------------------|-------------------|--------------------------|--------------------------|
| EVE 651723 | 4.25V | 8.5mA | 10°C | 45°C |


The main features of the cell in the battery are shown as below (clause 8.1.1):

| Model | Nominal capacity | Nominal voltage | Nominal Charge Current | Nominal Discharge Current | Maximum Charge Current | Maximum Discharge Current | Maximum Charge Voltage | Cut-off Voltage |
|--------|------------------|-----------------|------------------------|---------------------------|------------------------|---------------------------|------------------------|-----------------|
| 651723 | 170mAh | 3.7V | 34mA | 34mA | 170mA | 225mA | 4.2V | 3.0V |

The main features of the cell in the battery are shown as below (clause 8.1.2):


| Model | Upper limit charge voltage | Taper-off current | Lower charge temperature | Upper charge temperature |
|--------|----------------------------|-------------------|--------------------------|--------------------------|
| 651723 | 4.25V | 8.5mA | 10°C | 45°C |

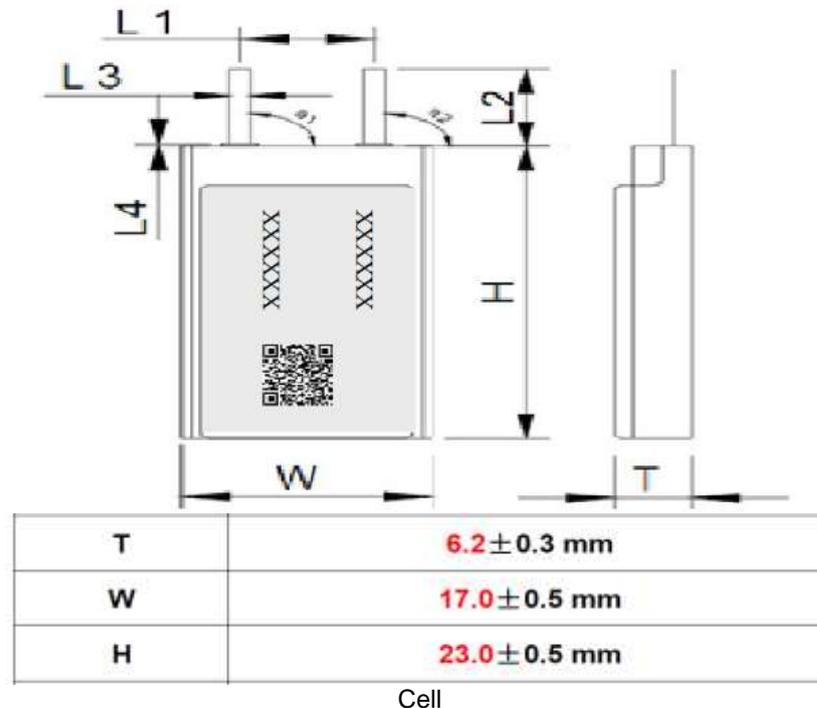Construction:

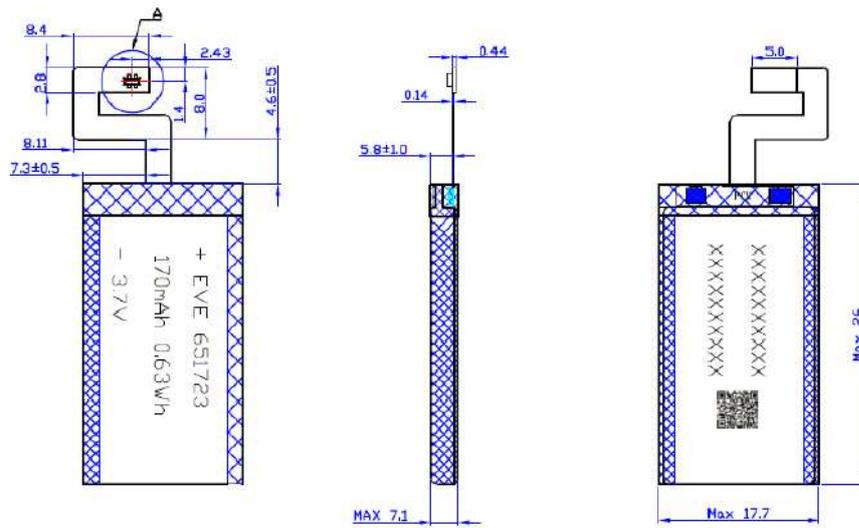


Battery Unit(mm)

Circuit diagram:

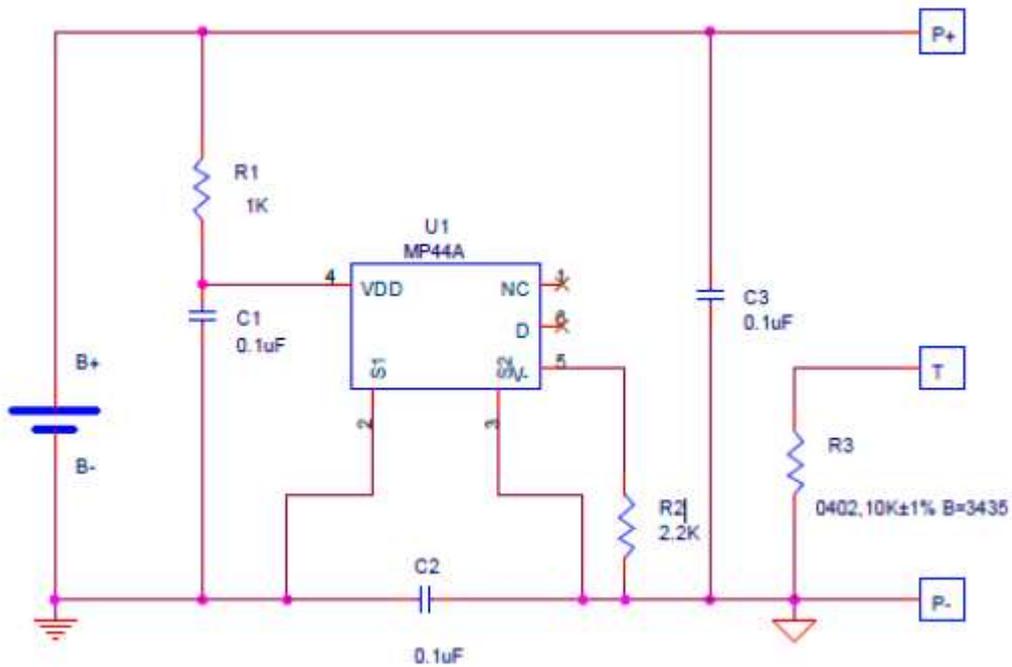

| IEC 62133: 2012 | | | |
|-----------------|---|---|----------|
| Clause | Requirement + Test | Result - Remark | Verdict |
| 4 | Parameter measurement tolerances | | P |
| | Parameter measurement tolerances | | P |
| 5 | General safety considerations | | P |
| 5.1 | General | | P |
| 5.2 | Insulation and wiring | | P |
| | The insulation resistance between the positive terminal and externally exposed metal surfaces of the battery (excluding electrical contact surfaces) is not less than 5 MΩ | No metal case exists. | N/A |
| | Insulation resistance (MΩ) : | | — |
| | Internal wiring and insulation are sufficient to withstand maximum anticipated current, voltage and temperature requirements | | P |
| | Orientation of wiring maintains adequate creepage and clearance distances between conductors | | P |
| | Mechanical integrity of internal connections accommodates reasonably foreseeable misuse | | P |
| 5.3 | Venting | | P |
| | Battery cases and cells incorporate a pressure relief mechanism or are constructed so that they relieve excessive internal pressure at a value and rate that will preclude rupture, explosion and self-ignition | Venting mechanism exists on the narrow side of cell. | P |
| | Encapsulation used to support cells within an outer casing does not cause the battery to overheat during normal operation nor inhibit pressure relief | | N/A |
| 5.4 | Temperature/voltage/current management | | P |
| | Batteries are designed such that abnormal temperature rise conditions are prevented | Overcharge, over discharge, over current and short-circuit proof circuit used in this battery. See tests of clause 8. | P |
| | Batteries are designed to be within temperature, voltage and current limits specified by the cell manufacturer | See above. | P |
| | Batteries are provided with specifications and charging instructions for equipment manufacturers so that associated chargers are designed to maintain charging within the temperature, voltage and current limits specified | The charging limits specified in the user manual. | P |
| 5.5 | Terminal contacts | | P |
| | Terminals have a clear polarity marking on the external surface of the battery | DC connector used. | P |

| IEC 62133: 2012 | | | |
|-----------------|--|--|---------|
| Clause | Requirement + Test | Result - Remark | Verdict |
| | The size and shape of the terminal contacts ensure that they can carry the maximum anticipated current | DC connector complies with the requirements. | P |
| | External terminal contact surfaces are formed from conductive materials with good mechanical strength and corrosion resistance | | P |
| | Terminal contacts are arranged to minimize the risk of short circuits | | P |
| 5.6 | Assembly of cells into batteries | Single cell battery. | P |
| 5.6.1 | If there is more than one battery housed in a single battery case, cells used in the assembly of each battery have closely matched capacities, be of the same design, be of the same chemistry and be from the same manufacturer | | N/A |
| | Each battery has an independent control and protection | | N/A |
| | Manufacturers of cells make recommendations about current, voltage and temperature limits so that the battery manufacturer/designer may ensure proper design and assembly | | N/A |
| | Batteries that are designed for the selective discharge of a portion of their series connected cells incorporate separate circuitry to prevent the cell reversal caused by uneven discharges | | N/A |
| | Protective circuit components are added as appropriate and consideration given to the end-device application | | N/A |
| | When testing a battery, the manufacturer of the battery provides a test report confirming the compliance according to this standard | | N/A |
| 5.6.2 | Design recommendation for lithium systems only | | P |
| | For the battery consisting of a single cell or a single cellblock: - Charging voltage of the cell does not exceed the upper limit of the charging voltage specified in Clause 8.1.2, Table 4; or | Charging voltage: 4.2V, not exceed 4.25V, specified in Clause 8.1.2, Table 4 | P |
| | - Charging voltage of the cell does not exceed the different upper limit of the charging voltage determined through Clause 8.1.2, NOTE 1. | | N/A |
| | For the battery consisting of series-connected plural single cells or series-connected plural cellblocks: - The voltages of any one of the single cells or single cellblocks does not exceed the upper limit of the charging voltage, specified in Clause 8.1.2, Table 4, by monitoring the voltage of every single cell or the single cellblocks; or | | N/A |

| IEC 62133: 2012 | | | |
|------------------------|--|---|------------|
| Clause | Requirement + Test | Result - Remark | Verdict |
| | - The voltages of any one of the single cells or single cellblocks does not exceed the different upper limit of the charging voltage, determined through Clause 8.1.2, NOTE 1, by monitoring the voltage of every single cell or the single cellblocks | | N/A |
| | For the battery consisting of series-connected plural single cells or series-connected plural cellblocks: - Charging is stopped when the upper limit of the charging voltage, specified in Clause 8.1.2, Table 4, is exceeded for any one of the single cells or single cellblocks by measuring the voltage of every single cell or the single cellblocks; or | | N/A |
| | - Charging is stopped when the upper limit of the different charging voltage, determined through Clause 8.1.2, NOTE 1, is exceeded for any one of the single cells or single cellblocks by measuring the voltage of every single cell or the single cellblocks | | N/A |
| 5.7 | Quality plan | | P |
| | The manufacturer prepares and implements a quality plan that defines procedures for the inspection of materials, components, cells and batteries and which covers the whole process of producing each type of cell or battery | Complied. ISO 9001: 2008 certificate provided. | P |
| 6 | Type test conditions | | P |
| | Tests were made with the number of cells or batteries specified in Table 1 for nickel-cadmium and nickel-metal hydride systems and Table 2 for lithium systems, using cells or batteries that are not more than six months old | Complied. Table 2 for Lithium system. | P |
| | Unless noted otherwise in the test methods, testing was conducted in an ambient of 20°C ± 5°C. | Tests are carried out at 20°C ± 5°C. | P |
| 7 | Specific requirements and tests (nickel systems) | | N/A |
| 7.1 | Charging procedure for test purposes | Lithium system. | N/A |
| 7.2 | Intended use | | N/A |
| 7.2.1 | Continuous low-rate charging (cells) | | N/A |
| | Results: No fire. No explosion | | N/A |
| 7.2.2 | Vibration | | N/A |
| | Results: No fire. No explosion. No leakage | | N/A |
| 7.2.3 | Moulded case stress at high ambient temperature | | N/A |
| | Oven temperature (°C) | | — |

| IEC 62133: 2012 | | | |
|------------------------|--|-----------------|---------|
| Clause | Requirement + Test | Result - Remark | Verdict |
| | Results: No physical distortion of the battery casing resulting in exposure if internal components | | N/A |
| 7.2.4 | Temperature cycling | | N/A |
| | Results: No fire. No explosion. No leakage. | | N/A |
| 7.3 | Reasonably foreseeable misuse | | N/A |
| 7.3.1 | Incorrect installation cell | | N/A |
| | The test was carried out using: - Four fully charged cells of the same brand, type, size and age connected in series, with one of them reversed; or | | N/A |
| | - A stabilized dc power supply. | | N/A |
| | Results: No fire. No explosion..... : | | N/A |
| 7.3.2 | External short circuit | | N/A |
| | The cells or batteries were tested until one of the following occurred: - 24 hours elapsed; or | | N/A |
| | - The case temperature declined by 20% of the maximum temperature rise | | N/A |
| | Results: No fire. No explosion..... : | | N/A |
| 7.3.3 | Free fall | | N/A |
| | Results: No fire. No explosion. | | N/A |
| 7.3.4 | Mechanical shock (crash hazard) | | N/A |
| | Results: No fire. No explosion. No leakage. | | N/A |
| 7.3.5 | Thermal abuse | | N/A |
| | Oven temperature (°C)..... : | | — |
| | Results: No fire. No explosion. | | N/A |
| 7.3.6 | Crushing of cells | | N/A |
| | The crushing force was released upon: - The maximum force of 13 kN ± 1 kN has been applied; or | | N/A |
| | - An abrupt voltage drop of one-third of the original voltage has been obtained | | N/A |
| | The cell is prismatic type and a second set of samples was tested, rotated 90° around longitudinal axis compared to the first set | | N/A |
| | Results: No fire. No explosion..... : | | N/A |
| 7.3.7 | Low pressure | | N/A |
| | Chamber pressure (kPa)..... : | | — |

| IEC 62133: 2012 | | | |
|------------------------|---|--------------------------------------|----------|
| Clause | Requirement + Test | Result - Remark | Verdict |
| | Results: No fire. No explosion. No leakage. | | N/A |
| 7.3.8 | Overcharge | | N/A |
| | Results: No fire. No explosion..... : | | N/A |
| 7.3.9 | Forced discharge | | N/A |
| | Results: No fire. No explosion..... : | | N/A |
| 8 | Specific requirements and tests (lithium systems) | | P |
| 8.1 | Charging procedures for test purposes | | P |
| 8.1.1 | First procedure: This charging procedure applied to tests other than those specified in 8.1.2 | | P |
| 8.1.2 | Second procedure: This charging procedure applied to the tests of 8.3.1, 8.3.2, 8.3.4, 8.3.5, and 8.3.9 | | P |
| | If a cell's specified upper and/or lower charging temperature exceeds values for the upper and/or lower limit test temperatures of Table 4, the cells were charged at the specified values plus 5 °C for the upper limit and minus 5 °C for the lower limit | Charge temperature 10-45°C declared. | N/A |
| | A valid rationale was provided to ensure the safety of the cell (see Figure A.1) : | | N/A |
| | For a different upper limit charging voltage (i.e. other than for lithium cobalt oxide systems at 4,25 V), the applied upper limit charging voltage and upper limit charging temperatures were adjusted accordingly | Lithium cobalt oxide system only | N/A |
| | A valid rationale was provided to ensure the safety of the cell (see Figure A.1) : | | N/A |
| 8.2 | Intended use | | P |
| 8.2.1 | Continuous charging at constant voltage (cells) | Test complied. | P |
| | Results: No fire. No explosion..... : | (See Table 8.2.1) | P |
| 8.2.2 | Moulded case stress at high ambient temperature (battery) | No moulded case exists | N/A |
| | Oven temperature (°C) : | | — |
| | Results: No physical distortion of the battery casing resulting in exposure if internal components | | N/A |
| 8.3 | Reasonably foreseeable misuse | | P |
| 8.3.1 | External short circuit (cell) | | P |
| | The cells were tested until one of the following occurred: - 24 hours elapsed; or | | N/A |

| IEC 62133: 2012 | | | |
|-----------------|--|------------------------|---------|
| Clause | Requirement + Test | Result - Remark | Verdict |
| | - The case temperature declined by 20% of the maximum temperature rise | | P |
| | Results: No fire. No explosion..... : | (See Table 8.3.1) | P |
| 8.3.2 | External short circuit (battery) | | P |
| | The cells were tested until one of the following occurred: - 24 hours elapsed; or | | P |
| | - The case temperature declined by 20% of the maximum temperature rise | | N/A |
| | In case of rapid decline in short circuit current, the battery pack remained on test for an additional one hour after the current reached a low end steady state condition | | N/A |
| | Results: No fire. No explosion..... : | (See Table 8.3.2) | P |
| 8.3.3 | Free fall | | P |
| | Results: No fire. No explosion. | No fire. No explosion. | P |
| 8.3.4 | Thermal abuse (cells) | | P |
| | The cells were held at 130°C ± 2°C for: - 10 minutes; or | Test complied. | P |
| | - 30 minutes for large cells (gross mass of more than 500 g as defined in IEC 62281) | | N/A |
| | Oven temperature (°C)..... : | 130°C | — |
| | Gross mass of cell (g)..... : | <500g, small cell. | — |
| | Results: No fire. No explosion. | No fire. No explosion. | P |
| 8.3.5 | Crush (cells) | | P |
| | The crushing force was released upon: - The maximum force of 13 kN ± 1 kN has been applied; or | Test complied. | P |
| | - An abrupt voltage drop of one-third of the original voltage has been obtained; or | | N/A |
| | - 10% of deformation has occurred compared to the initial dimension | | N/A |
| | Results: No fire. No explosion..... : | (See Table 8.3.5) | P |
| 8.3.6 | Over-charging of battery | | P |
| | Test was continued until the temperature of the outer casing: - Reached steady state conditions (less than 10°C change in 30-minute period); or | | N/A |
| | - Returned to ambient | | P |
| | Results: No fire. No explosion..... : | (See Table 8.3.6) | P |

| IEC 62133: 2012 | | | |
|------------------------|--|--|----------|
| Clause | Requirement + Test | Result - Remark | Verdict |
| 8.3.7 | Forced discharge (cells) | | P |
| | Results: No fire. No explosion..... : | (See Table 8.3.7) | P |
| 8.3.8 | Transport tests | | P |
| | Manufacturer's documentation provided to show compliance with UN Recommendations on Transport of Dangerous Goods | Test complied. | P |
| 8.3.9 | Design evaluation – Forced internal short circuit (cells) | Test complied. | P |
| | The cells complied with national requirement for : | France, Japan, Republic of Korea, Switzerland. | — |
| | The pressing was stopped upon: - A voltage drop of 50 mV has been detected; or | | P |
| | - The pressing force of 800 N (cylindrical cells) or 400 N (prismatic cells) has been reached | 400 N | P |
| | Results: No fire : | (See Table 8.3.9) | P |
| 9 | Information for safety | | P |
| | The manufacturer of secondary cells ensures that information is provided about current, voltage and temperature limits of their products. | Cell specifications provided. | P |
| | The manufacturer of batteries ensures that equipment manufacturers and, in the case of direct sales, end-users are provided with information to minimize and mitigate hazards. | Battery pack specifications provided. | P |
| | Systems analyses performed by device manufacturers to ensure that a particular battery design prevents hazards from occurring during use of a product | | N/A |
| | As appropriate, information relating to hazard avoidance resulting from a system analysis is provided to the end user : | | N/A |
| 10 | Marking | | P |
| 10.1 | Cell marking | | N/A |
| | Cells marked as specified in the applicable cell standards: IEC 61951-1, IEC 61951-2 or IEC 61960. | The final product is battery. | N/A |
| 10.2 | Battery marking | | P |
| | Batteries marked in accordance with the requirements for the cells from which they are assembled. | See marking plate on page 4. | P |
| | Batteries marked with an appropriate caution statement. | | N/A |

| IEC 62133: 2012 | | | |
|-----------------|---|---|---------|
| Clause | Requirement + Test | Result - Remark | Verdict |
| 10.3 | Other information | | P |
| | Storage and disposal instructions marked on or supplied with the battery. | | N/A |
| | Recommended charging instructions marked on or supplied with the battery. | Information for recommended charging instructions mentioned in manufacturer's specifications. | P |

| | | | |
|-----------|--|--|----------|
| 11 | Packaging | | P |
| | The materials and packaging design are chosen so as to prevent the development of unintentional electrical conduction, corrosion of the terminals and ingress of environmental contaminants. | | P |

| | | | |
|----------------|---|--|----------|
| Annex A | Charging range of secondary lithium ion cells for safe use | | P |
| A.1 | General | | P |
| A.2 | Safety of lithium-ion secondary battery | Complied. | P |
| A.3 | Consideration on charging voltage | Complied. | P |
| A.3.1 | General | Charging voltage is 4.2V | P |
| A.3.2 | Upper limit charging voltage | 4.25 V | P |
| A.3.2.1 | General | | P |
| A.3.2.2 | Explanation of safety viewpoint | | N/A |
| A.3.2.3 | Safety requirements, when different upper limit charging voltage is applied | 4.25V applied. | N/A |
| A.4 | Consideration of temperature and charging current | | P |
| A.4.1 | General | | P |
| A.4.2 | Recommended temperature range | See A.4.2.2. | P |
| A.4.2.1 | General | | P |
| A.4.2.2 | Safety consideration when a different recommended temperature range is applied | Charging temperature declared by client is: 10-45°C | P |
| A.4.3 | High temperature range | Not higher than the temperature range specific in this standard. | N/A |
| A.4.3.1 | General | | N/A |
| A.4.3.2 | Explanation of safety viewpoint | | N/A |
| A.4.3.3 | Safety considerations when specifying charging conditions in high temperature range | | N/A |
| A.4.3.4 | Safety consideration when specifying new upper limit in high temperature range | | N/A |

| IEC 62133: 2012 | | | |
|------------------------|---|---|---------|
| Clause | Requirement + Test | Result - Remark | Verdict |
| A.4.4 | Low temperature range | Charging low temperature declared by client is: 10°C. | N/A |
| A.4.4.1 | General | | N/A |
| A.4.4.2 | Explanation of safety viewpoint | | N/A |
| A.4.4.3 | Safety considerations, when specifying charging conditions in low temperature range | | N/A |
| A.4.4.4 | Safety considerations when specifying a new lower limit in the low temperature range | Not lower than the temperature range specific in this standard. | N/A |
| A.4.5 | Scope of the application of charging current | | P |
| A.5 | Sample preparation | | P |
| A.5.1 | General | | P |
| A.5.2 | Insertion procedure for nickel particle to generate internal short | | P |
| | The insertion procedure carried out at 20°C±5°C and under -25 °C of dew point | | P |
| A.5.3 | Disassembly of charged cell | | P |
| A.5.4 | Shape of nickel particle | | P |
| A.5.5 | Insertion of nickel particle to cylindrical cell | | N/A |
| A.5.5.1 | Insertion of nickel particle to winding core | | N/A |
| A.5.5.2 | Mark the position of nickel particle on the both end of winding core of the separator | | N/A |
| A.5.6 | Insertion of nickel particle to prismatic cell | | P |

| TABLE: Critical components information | | | | | P |
|---|--|-------------------------|--|-----------------|-------------------------------------|
| Object/part no. | Manufacturer/trademark | Type/model | Technical data | Standard | Mark(s) of conformity ¹⁾ |
| Cell | EVE Energy Co., Ltd. | 651723 | 3.7V, 170mAh | IEC 62133: 2012 | Tested with appliance |
| -Positive electrode | Beijing Easpring Material Technology Co., Ltd | 5# | D50: 6.15±1.0µm Tap Density: 2.29±0.3g/cm ³ , LiCoO ₂ | -- | -- |
| -Negative electrode | Shanghai Shanshan Technology Co., Ltd | FSN-1 | D50: 15.0±2.0µm Tap Density: 1.10±0.1g/cm ³ , Graphite | -- | -- |
| -Separator | Sinoma Science & Technology Co., Ltd | PE | Thickness: 16µm, Shutdown temperature: 130±5°C | -- | -- |
| -Electrolyte | Shenzhen Capchem Technology Co., Ltd | LBC316A42 | LiPF ₆ +EC+EMC+DEC | -- | -- |
| -Outer case | Showa Denko Package Corporation | CPP40 | Nylon, PP, Aluminum, Thickness: 0.113mm | -- | -- |
| -Positive electrode tab | Shanghai Yuanzi Electronic Technology Co., Ltd | Aluminium Tab | 0.1*2.0mm | -- | -- |
| -Negative electrode tab | Shanghai Yuanzi Electronic Technology Co., Ltd | Nickel Tab | 0.1*2.0mm | -- | -- |
| PCB | DONGGUAN YIDONG ELECTRONIC CO LTD | PM | V-0, 130°C | UL 94 UL 796 | UL E347037 |
| Connector | Hirose | BM29B-2DP-2-0.35V(51)DS | Terminal Pitch: 0.35mm | -- | -- |
| IC (U1) | Interchangeable | Interchangeable | Over charge protection voltage: 4.250V~4.300V, Over discharge protection voltage: 2.245V~2.355V | -- | Tested with appliance |
| Supplementary information: | | | | | |
| ¹⁾ Provided evidence ensures the agreed level of compliance. | | | | | |

| 7.2.1 | TABLE: Continuous low rate charge (cells) | | | | | N/A |
|-------|---|--|--|-----------------------------|---------|-----|
| Model | Recommended charging method, (CC, CV, or CC/CV) | Recommended charging voltage V_c , (Vdc) | Recommended charging current I_{rec} , (A) | OCV at start of test, (Vdc) | Results | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |

Supplementary information:

- No fire or explosion
- No leakage
- Leakage
- Fire
- Explosion
- Bulge
- Others (please explain)

| 7.2.2 | TABLE: Vibration | | N/A |
|-------|-----------------------------|---------|-----|
| Model | OCV at start of test, (Vdc) | Results | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |

Supplementary information:

- No fire or explosion
- No leakage
- Leakage
- Fire
- Explosion
- Bulge
- Others (please explain)

| 7.3.1 | TABLE: Incorrect installation (cells) | | N/A |
|-------|---------------------------------------|---------|-----|
| Model | OCV of reversed cell, (Vdc) | Results | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |

Supplementary information:

- No fire or explosion
- No leakage
- Leakage
- Fire
- Explosion
- Bulge
- Others (please explain)

| 7.3.2 | TABLE: External short circuit | | | | | N/A |
|-------|---------------------------------------|-----------------------------|----------------------------|--|---------|-----|
| Model | Ambient (at 20°C ± 5°C or 55°C ± 5°C) | OCV at start of test, (Vdc) | Resistance of circuit, (Ω) | Maximum case temperature rise ΔT, (°C) | Results | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |

Supplementary information:

- No fire or explosion
- No leakage
- Leakage
- Fire
- Explosion
- Bulge
- Others (please explain)

| 7.3.6 | TABLE: Crush | | | N/A |
|-------|-----------------------------|---|---------|-----|
| Model | OCV at start of test, (Vdc) | OCV at removal of crushing force, (Vdc) | Results | |
| | | | | |
| | | | | |
| | | | | |
| | | | | |

| |
|--|
| Supplementary information: <ul style="list-style-type: none"> - No fire or explosion - No leakage - Leakage - Fire - Explosion - Bulge - Others (please explain) |
|--|

| 7.3.8 | TABLE: Overcharge | | | | N/A |
|--------------|------------------------------|-----------------------------|----------------------------|---------|------------|
| Model | OCV prior to charging, (Vdc) | Maximum charge current, (A) | Time for charging, (hours) | Results | |
| | | | | | |
| | | | | | |
| | | | | | |
| | | | | | |
| | | | | | |

| |
|--|
| Supplementary information: <ul style="list-style-type: none"> - No fire or explosion - No leakage - Leakage - Fire - Explosion - Bulge - Others (please explain) |
|--|

| 7.3.9 | TABLE: Forced discharge (cells) | | | | N/A |
|--------------|---|-------------------------------------|-------------------------------------|---------|------------|
| Model | OCV before application of reverse charge, (Vdc) | Measured reverse charge I_r , (A) | Time for reversed charge, (minutes) | Results | |
| | | | | | |
| | | | | | |
| | | | | | |
| | | | | | |
| | | | | | |

| |
|--|
| Supplementary information: <ul style="list-style-type: none"> - No fire or explosion - No leakage - Leakage - Fire - Explosion - Bulge - Others (please explain) |
|--|

| 8.2.1 | TABLE: Continuous charging at constant voltage (cells) | | | | P |
|-----------------------------------|--|--|-----------------------------|---------|---|
| Model | Recommended charging voltage V_{c_1} (Vdc) | Recommended charging current I_{rec_1} (A) | OCV at start of test, (Vdc) | Results | |
| Cell #1 | 4.20 | 0.034 | 4.18 | P | |
| Cell #2 | 4.20 | 0.034 | 4.18 | P | |
| Cell #3 | 4.20 | 0.034 | 4.17 | P | |
| Cell #4 | 4.20 | 0.034 | 4.19 | P | |
| Cell #5 | 4.20 | 0.034 | 4.18 | P | |
| Supplementary information: | | | | | |
| - No fire or explosion | | | | | |
| - No leakage | | | | | |

| 8.3.1 | TABLE: External short circuit (cell) | | | | | P |
|---|--------------------------------------|-----------------------------|-------------------------------------|---|---------|---|
| Model | Ambient, (°C) | OCV at start of test, (Vdc) | Resistance of circuit, (Ω) | Maximum case temperature rise ΔT , (°C) | Results | |
| Samples charged at charging temperature upper limit (45°C) | | | | | | |
| Cell #1 | 20.3 | 4.21 | 0.08 | 106.5 | P | |
| Cell #2 | 20.3 | 4.22 | 0.08 | 101.9 | P | |
| Cell #3 | 20.3 | 4.21 | 0.08 | 107.4 | P | |
| Cell #4 | 20.3 | 4.21 | 0.08 | 96.7 | P | |
| Cell #5 | 20.3 | 4.22 | 0.08 | 105.3 | P | |
| Samples charged at charging temperature lower limit (10°C) | | | | | | |
| Cell #6 | 19.2 | 4.17 | 0.08 | 112.6 | P | |
| Cell #7 | 19.2 | 4.18 | 0.08 | 103.8 | P | |
| Cell #8 | 19.2 | 4.17 | 0.08 | 104.9 | P | |
| Cell #9 | 19.2 | 4.17 | 0.08 | 101.0 | P | |
| Cell #10 | 19.2 | 4.18 | 0.08 | 102.1 | P | |
| Supplementary information: | | | | | | |
| - No fire or explosion | | | | | | |

| 8.3.2 | TABLE: External short circuit (battery) | | | | | P |
|---|---|-----------------------------|----------------------------|---|---------|---|
| Model | Ambient, (°C) | OCV at start of test, (Vdc) | Resistance of circuit, (Ω) | Maximum case temperature rise ΔT , (°C) | Results | |
| Samples charged at charging temperature upper limit (45°C) | | | | | | |
| Battery #1 | 55.8 | 4.21 | 0.08 | 56.4 | P | |
| Battery #2 | 55.8 | 4.21 | 0.08 | 56.3 | P | |
| Battery #3 | 55.8 | 4.21 | 0.08 | 56.3 | P | |
| Battery #4 | 55.8 | 4.22 | 0.08 | 56.1 | P | |
| Battery #5 | 55.8 | 4.22 | 0.08 | 56.0 | P | |
| Samples charged at charging temperature lower limit (10°C) | | | | | | |
| Battery #6 | 56.1 | 4.17 | 0.08 | 56.9 | P | |
| Battery #7 | 56.1 | 4.17 | 0.08 | 56.5 | P | |
| Battery #8 | 56.1 | 4.18 | 0.08 | 56.4 | P | |
| Battery #9 | 56.1 | 4.17 | 0.08 | 56.6 | P | |
| Battery #10 | 56.1 | 4.18 | 0.08 | 56.7 | P | |
| Supplementary information: - No fire or explosion | | | | | | |

| 8.3.5 | TABLE: Crush | | | | | P |
|---|-----------------------------|---|---|--------------------------------------|---------|---|
| Model | OCV at start of test, (Vdc) | OCV at removal of crushing force, (Vdc) | Width/diameter of cell before crush, (mm) | Required deformation for crush, (mm) | Results | |
| Samples charged at charging temperature upper limit (45°C) | | | | | | |
| Cell #1 | 4.21 | -- | -- | -- | P | |
| Cell #2 | 4.21 | -- | -- | -- | P | |
| Cell #3 | 4.22 | -- | -- | -- | P | |
| Cell #4 | 4.21 | -- | -- | -- | P | |
| Cell #5 | 4.21 | -- | -- | -- | P | |
| Note: A 13kN force applied at the wide side of prismatic cells. | | | | | | |
| Supplementary information: - No fire or explosion | | | | | | |

| 8.3.6 | | TABLE: Over-charging of battery | | | P |
|-------------------------------------|----------------------------|-------------------------------------|--|---------|---|
| Constant charging current (A).....: | | 0.34A | | | — |
| Supply voltage (Vdc).....: | | 5V | | | — |
| Model | OCV before charging, (Vdc) | Resistance of circuit, (Ω) | Maximum outer casing temperature, ($^{\circ}\text{C}$) | Results | |
| Battery #1 | 3.34 | 0.03 | 30.7 | P | |
| Battery #2 | 3.32 | 0.03 | 28.5 | P | |
| Battery #3 | 3.33 | 0.03 | 29.0 | P | |
| Battery #4 | 3.34 | 0.03 | 29.2 | P | |
| Battery #5 | 3.32 | 0.03 | 28.3 | P | |
| Supplementary information: | | | | | |
| - No fire or explosion | | | | | |

| 8.3.7 | | TABLE: Forced discharge (cells) | | | P |
|-----------------------------------|---|-------------------------------------|-------------------------------------|---------|---|
| Model | OCV before application of reverse charge, (Vdc) | Measured Reverse charge I_r , (A) | Time for reversed charge, (minutes) | Results | |
| Cell #1 | 3.10 | 0.17 | 90 | P | |
| Cell #2 | 3.11 | 0.17 | 90 | P | |
| Cell #3 | 3.12 | 0.17 | 90 | P | |
| Cell #4 | 3.10 | 0.17 | 90 | P | |
| Cell #5 | 3.11 | 0.17 | 90 | P | |
| Supplementary information: | | | | | |
| - No fire or explosion | | | | | |

| 8.3.8 T-5 | | | | | TABLE: External short circuit (cell) | P |
|-----------|---------------|-----------------------------|----------------------------|---|--------------------------------------|---|
| Model | Ambient, (°C) | OCV at start of test, (Vdc) | Resistance of circuit, (Ω) | Maximum Case Temperature Rise ΔT_c , °C | Results | |
| Cell #1 | 55.8 | 4.17 | 0.08 | 106.3 | P | |
| Cell #2 | 55.8 | 4.18 | 0.08 | 100.4 | P | |
| Cell #3 | 55.8 | 4.18 | 0.08 | 99.2 | P | |
| Cell #4 | 55.8 | 4.17 | 0.08 | 92.9 | P | |
| Cell #5 | 55.8 | 4.17 | 0.08 | 96.0 | P | |
| Cell #6 | 55.8 | 4.18 | 0.08 | 91.5 | P | |
| Cell #7 | 55.8 | 4.18 | 0.08 | 102.5 | P | |
| Cell #8 | 55.8 | 4.17 | 0.08 | 97.3 | P | |
| Cell #9 | 55.8 | 4.18 | 0.08 | 95.4 | P | |
| Cell #10 | 55.8 | 4.18 | 0.08 | 101.6 | P | |

Supplementary information:
The external short-circuit test of 10 pcs samples performed after the test of Altitude, Thermal cycling, Vibration and Shock in sequence.
-No excessive temperature rise, no rupture, no explosion and no fire

| 8.3.9 | | | | | | TABLE: Forced internal short circuit (cells) | P |
|------------------|-----------------------|-----------------------------|---------------------------------|-------------------------------|--------------------|--|---|
| Number of sample | Chamber ambient, (°C) | OCV at start of test, (Vdc) | Particle location ¹⁾ | Maximum applied pressure, (N) | Voltage drop, (mV) | Results | |
| c59# | 45 | 4.21 | 1 | 103.7 | 67.9 | P | |
| c60# | 45 | 4.21 | 1 | 98.5 | 165.3 | P | |
| c61# | 45 | 4.20 | 1 | 232.6 | 77.4 | P | |
| c62# | 45 | 4.20 | 1 | 137.5 | 431.5 | P | |
| c63# | 45 | 4.22 | 1 | 69.7 | 326.2 | P | |
| c64# | 10 | 4.21 | 1 | 399.8 | 2 | P | |
| c65# | 10 | 4.17 | 1 | 109.6 | 96.3 | P | |
| c66# | 10 | 4.18 | 1 | 308.2 | 238.5 | P | |
| c67# | 10 | 4.17 | 1 | 267.8 | 167.3 | P | |
| c68# | 10 | 4.18 | 1 | 167.4 | 526.7 | P | |

Supplementary information:
¹⁾ Identify one of the following:
1: Nickel particle inserted between positive and negative (active material) coated area (3pcs).
2: Nickel particle inserted between positive aluminium foil and negative active material coated area (2pcs).
- No fire

-- End of Report --

Product: Li-ion Polymer Battery

Type Designation: EVE 651723

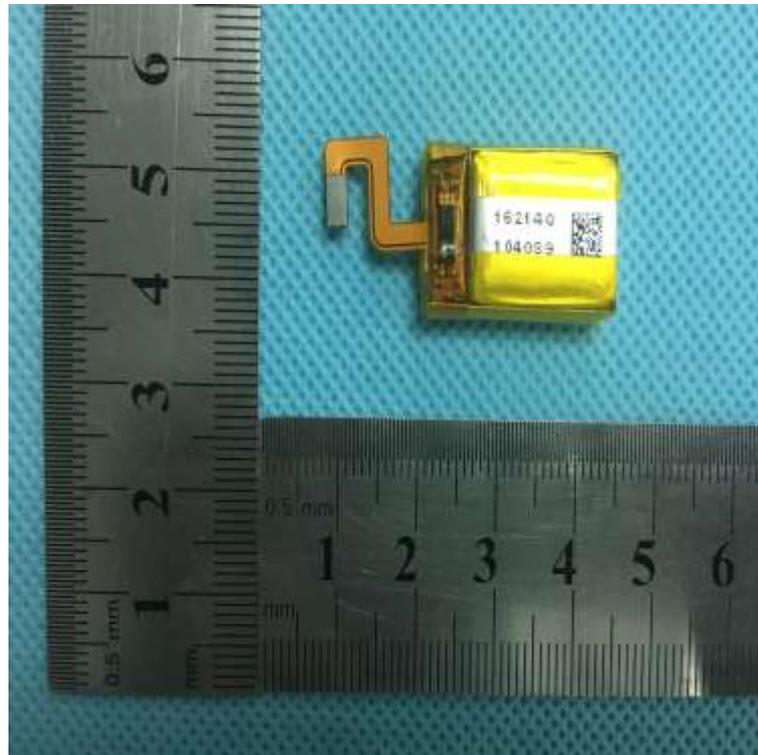


Figure 1 Front view of battery



Figure 2 Back view of battery

Product: Li-ion Polymer Battery

Type Designation: EVE 651723

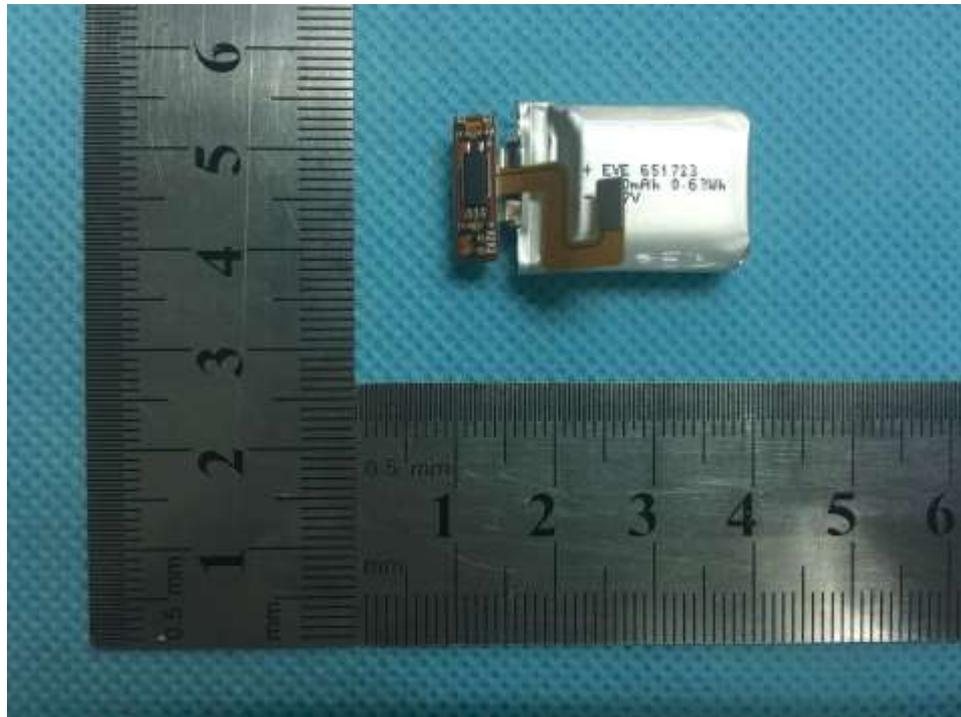


Figure 3 Inside view of battery



Figure 4 Front view of cell

Product: Li-ion Polymer Battery

Type Designation: EVE 651723



Figure 5 Back view of cell

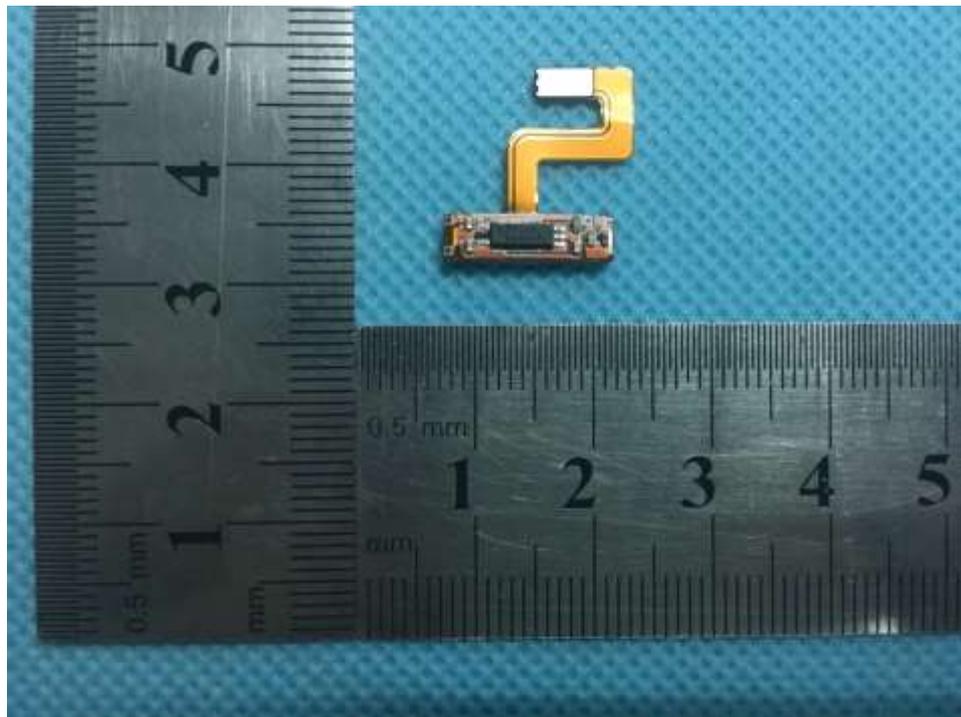


Figure6 Front view of PCB

Product: Li-ion Polymer Battery

Type Designation: EVE 651723

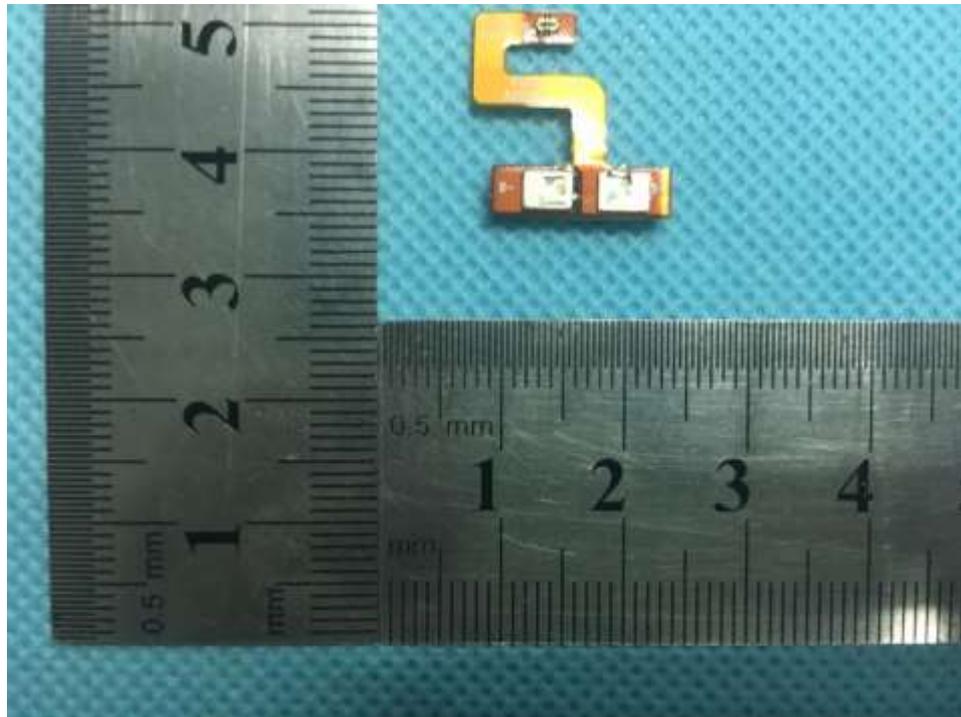


Figure 7 Back view of PCB